
Vamat® GH DW 30

Dishwashing liquid, highly alkaline



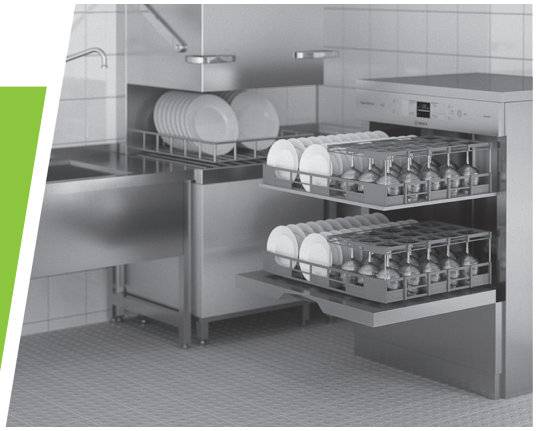

Area of application

- In the food processing sector including bakeries, butchers and large kitchens in the catering and hotel industry etc.
- Particularly suitable for soft water areas
- Particularly suitable for crockery made of porcelain, glass, plastic, stainless steel and cutlery

Product properties

- Suitable for all dishwashers
- Effortlessly removes burnt-on food residues
- Excellent emulsifying capacity of greases
- Prevents the build-up of starch deposits
- Halal certified according to © HALAL CONTROL
- Fragrance-, chlorine- and phosphate-free
- Highly concentrated, therefore low dosage and high economic efficiency


Application and dosage

- Dosing is carried out via automatic dosing devices depending on the amount of dirt and the water hardness.



1 - 3 ml / 1 l water

- Automatic dishwasher cleaning: Dosing is carried out via automatic dosing devices depending on the amount of dirt and the water hardness.
- Apply fresh application solutions and consume them within 24 hours at the latest.



Note

- For water hardness above 7° d, the use of a softening system is required.
- Do not mix with other cleaning agent concentrates or cleaning products.
- Surfaces or objects that come into direct contact with food must be cleaned of cleaning residues by careful rinsing with water.
- Before changing the product, the containers, pipes and dosing devices must be rinsed with fresh water.
- After the dishwasher has finished operating, all screens should be cleaned.
- To dry the interior and protect against corrosion, leave the machine slightly open.
- Guideline values for conductivity measurement: Concentration in ml/L - Conductivity in mS/cm with osmosis water (0 °dH): 0.0 ml/L - 0.002 mS/cm; 1.0 ml/L - 3.550 mS/cm, 2.0 ml/L - 6.970 mS/cm, 3.0 ml/L - 10.370 mS/cm. Please note that these are laboratory values that depend on various factors such as the respective manufacturer, the machine and the water hardness. Therefore, deviations can occur.
- Avoid direct sunlight.
- Do not apply to aluminium.
- Changes or variations in colour of the product do not impact on the quality. The product image may differ in colour and shape from the original.
- **Safety:** Hazard statements and safety precautions can be found in the relevant safety data sheet, which is available at www.buzil.com.
- **Storage:** Always keep containers closed. Store at room temperature in the original container. Consume opened containers within 9 months.
- **Environmental:** Feed residual emptied containers to the dual system. For detailed information see environmental information.

Further information

- **Product colour:** colourless - light yellow
- **UFI code:** X220-A0D4-2004-QX2X
- For professional use only.

Sales units

- DW30-0025RA: 1 x 25kg canister
- DW30-0012RA: 1 x 12 kg canister

Date 21.08.2024

Remark: Some products may not be available in all territories. Please talk to your customer service representative.
The data in our product information sheets are based on our experience and careful investigations, and correspond to our present state of knowledge. We are, however, not able to examine and influence in detail the varying conditions for usage and materials, and those at premises where products are to be used. For this reason, we can only provide general information on usage. The quality of the work depends on expert assessment of the premises where products are to be used and how they are in fact employed by the user. In the case of doubt, the latter is obliged at all times to test the compatibility of the material to be treated with the Buzil product on an inconspicuous area or to obtain relevant advice on application technology. Liability for incomplete or incorrect data in our product information sheets shall only be assumed in cases of negligence caused by gross negligence or intent; any claims arising from the Product Liability Act shall remain unaffected. All previous product information shall lose its validity through the above listed product information.

BUZIL-WERK Wagner GmbH & Co. KG • Fraunhoferstraße 17 • D-87700 Memmingen • www.buzil.com